

IN Tag™

Robust low, high and ultrahigh frequency RFID tags that perform in tough conditions



IN Tag™ passive contactless RFID transponders are highly water, chemical and shock resistant, withstand peak temperatures up to 285° F (140° C) and are UL94-HB flame resistant.

Low frequency (LF) IN Tag discs perform well affixed to virtually any surface. They offer reliable, cost-effective tagging for near-proximity reader applications, with data storage from a 64-bit user ID, up to 2048-bit read-write capability.


High frequency (HF/NFC) discs offer anti-collision technology for faster data processing, larger memory storage, and improved read ranges. Some HF IN Tag (see PN “-EX”) are ATEX and IECEx certified for use in explosive environments. HF IN Tag devices are available with up to 1 kbit EEPROM or 8 kilobyte FRAM - the highest memory specified

by ISO/IEC 15693. FRAM tags are radiation resistant to survive Gamma sterilization and offer an exceptional speed with up to 10 billion write cycles.

Ultrahigh frequency (RAIN® UHF) IN Tag RFID tags can be read from up to 9.8 ft (3 m). Entire pallets of individual containers or equipment may be identified and item level status updated, as articles roll through distribution and receiving points. They are compliant to EPC Global Class 1 Gen 2 standards and readers.

HID IN Tag RFID tags come in a variety of sizes. For LF and HF applications, tiny 0.79 in (20 mm) discs may be glued or embedded virtually anywhere. If a larger read range is required, HID offers 1.18 in (30 mm) and 1.97 in (50 mm) options, which include pre-drilled holes for screw attachment. UHF tags come in 1.97 in (50 mm) and 2.17 in (55 mm) discs.

HID IN Tag transponders are an excellent performance-level tag. For lighter-duty applications, consider HID Epoxy Disc or World Tag™ transponders.

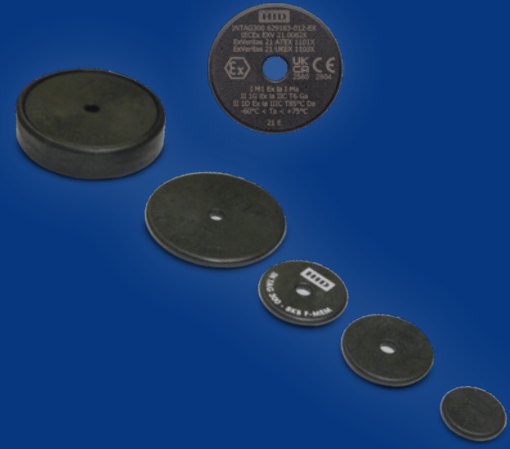

KEY BENEFITS:

- **Durable** – built to withstand the rigors of industrial processing, transportation and outdoor use
- **Versatile** – mounts anywhere without compromising performance: glass, plastic, or wood, with options for on metal mounting
- **Diverse selection** – broad spectrum of available frequencies, memory sizes and diameters with multiple fixation methods

TECHNOLOGY HIGHLIGHTS:

- Low Frequency (125 kHz), up to 2048 bit read-write memory
- High frequency (13.56 MHz), up to 8 kilobyte read-write memory
- Ultrahigh frequency (865 to 928 MHz), 240 bit EPC, 640 bit read-write memory
- Food compatible
- Flame and UV resistant
- Disc diameters of 20, 30, 50 mm (55 mm with spacer)
- Optional configurations for mounting on metal

For more information, contact tagsales@hidglobal.com

IN Tag™



HID can create a custom tag solution to fit your application requirements for chip type, dimensions, programming and materials.

APPLICATION AREAS:

Asset tracking and logistics

- Tool and equipment inventory
- Maintenance management

Automation and manufacturing







- Process automation
- Real-time materials inventory
- Food processing

Returnable transport items











- Inventory and distribution tracking
- Container maintenance

Waste management

- Bin tracking
- Recycling compliance monitoring
- Improved invoicing and service accuracy
- Route optimization
- Incentive-based waste and recycling programs

IN Tag™						
Low Frequency - LF						
	200	300		500		
						
Base Model Number	601182	623183	624183	601183	624185	601185
ELECTRONIC						
Operating Frequency	125 kHz					
Chip Type	Unique	HITAG S		Unique	HITAG S	Unique
Memory	64 bit read-only	256 bit EEPROM	2048 bit EEPROM	64 bit read-only	2048 bit EEPROM	64 bit read-only
Anti-collision		Yes			Yes	
Reading Distance 2 W reader ERP, free space	Dependent upon reader, environment and application					
PHYSICAL						
Dimensions	Ø 0.79 x 0.12 in (Ø 20 x 3 mm)	Ø 1.18 x 0.12 in (Ø 30 x 3 mm)			Ø 1.97 x 0.12 in (Ø 50 x 3 mm)	
Mounting Method	Embed, glue	Embed, glue, screw				
Fixation Hole Size		Ø 0.20 in (5.2 ± 0.3 mm)				
Affixes To	Glass, plastic, wood, metal					
Housing Material	PPA Polyphthalamide [ISO 1874: PA6T/6I-GF50]					
Color	Black					
Weight	0.04 oz (1.3 g)	0.11 oz (3 g)			0.34 oz (9.5 g)	
CHEMICAL AND MECHANICAL						
Water	IP68, IP69K, 176° F (80° C), 100 bar, 30 sec. 16 l/min					
Withstands Exposure To	Fuel B, mineral oil, petroleum, salt mist, vegetable oil, [UV resistant ISO 4892-2], [food compatible, directive 02/72/EC], [flame resistant UL94-HB]*					
Environmental Test Conditions	68° F (20° C), 100 h					
Vibration	IEC 68.2.6 [10 g, 10 to 2000 Hz, 3 axis, 2.5 h]					
Shock	IEC 68.2.29 [40 g, 18 ms, 6 axis, 2000 times]					
Drop Test	100 x 5.9 ft (1.8 m)					
Axial / Radial Force	800 N / 500 N, 10 sec.					
THERMAL						
Storage	-40° to +194° F (-40° to +90° C), 1000 h					
Operating	-13° to +185° F (-25° to +85° C)					
Shock/Fatigue	-40° to +194° F (-40° to +90° C) 50x5 min with 30 sec transition					
Peak	284° F (140° C), 100 h					
OTHER						
Standards	EN 60079-0:2009; EN 60079-11:2007; EN 60079-26:2007					
Box Size	1500 pcs	750 pcs			250 pcs	
Options	Custom embossed, printed or no logo					
Warranty	2 Years					

*Flame Resistance UL94-HB not applicable for spacer of INTag 500 OM or INTag 500 UHF OM.

	IN Tag™									
	High Frequency - HF						Ultrahigh Frequency - RAIN UHF			
	200	300 / 300 OM	500	200	300	300 8KB	500 EU	500 EU OM	500 US	500 US OM
										
Base Model Number	629182-012 629182-012-EX (ATEX/IECEX) 629182-013 (FOAM)	629183-012 629183-012-EX (ATEX/IECEX) 629183-312 (OM)	629185-012 629185-012-EX (ATEX/IECEX) 629185-312 (OM)	634182 634182-012-EX (ATEX/IECEX)	634183 634183-012-EX (ATEX/IECEX)	6D1183-010	6E5185-010	6E5185-310	6E5186-010	6E5186-310
ELECTRONIC										
Operating Frequency	13.56 MHz						865-868 MHz (ETSI)		902-928 MHz (FCC)	
Chip Type	ICODE SLIX 2			F-Mem			G2IM			
Memory	ICODE SLIX2 - 2560 Bit User Memory			2 Kbyte FRAM		8 Kbyte FRAM	640 bit EEPROM (96 bit TID, 256 bit EPC)			
Anti-collision	Yes									
Reading Distance 2 W reader ERP, free space	Dependent upon reader, environment and application						Up to 9.8 ft (3 m)			
PHYSICAL										
Dimensions	Ø 0.79 x 0.12 in (Ø 20 x 3 mm)	Ø 1.18 x 0.12 in (Ø 30 x 3 mm)	Ø 1.97 x 0.12 in (Ø 50 x 3 mm) OM: 2.17 x 0.51 in (55 x 13 mm)	Ø 0.79 x 0.12 in (Ø 20 x 3 mm)	Ø 1.18 x 0.12 in (Ø 30 x 3 mm)		Ø 1.97 x 0.14 in (Ø 50 x 3 mm)	Ø 2.17 x 0.51 in (Ø 55 x 13 mm)	Ø 1.97 x 0.14 in (Ø 50 x 3 mm)	Ø 2.17 x 0.51 in (Ø 55 x 13 mm)
Mounting Method	Embed, glue	Embed, glue, screw		Embed, glue	Embed, glue, screw					
Fixation Hole Size		Ø 0.20 in (5.2 ± 0.3 mm)				Ø 0.20 in (5.2 ± 0.3 mm)				
Affixes To	Glass, plastic, wood	Glass, plastic, wood, Metal (OM)	Glass, plastic, wood, Metal (OM)	Glass, plastic, wood			Glass, plastic, wood	Metal, glass, plastic, wood	Glass, plastic, wood	Metal, glass, plastic, wood
Housing Material	PPA Polyphthalamide [ISO 1874: PA6T/6i-GF50]									
Color	Black									
Weight	0.04 oz (1.3 g)	0.11 oz (3 g)	0.34 oz (9.5 g)	0.04 oz (1.3 g)	0.11 oz (3 g)		0.35 oz (9.5 g)	1.27 oz (36 g)	0.35 oz (9.5 g)	1.27 oz (36 g)
CHEMICAL AND MECHANICAL										
Water	IP68, IP69K, 176° F (80° C), 100 bar, 30 sec. 16 l/min									
Withstands Exposure To	Fuel B, oil, petroleum, salt mist (not applicable for 300 OM), vegetable oil, [UV resistant ISO 4892-2], [food compatible, directive 02/72/EC], [flame resistant UL94-HB]*									
Environmental Test Conditions	68° F (20° C), 100 h									
Vibration	IEC 68.2.6 [10 g, 10 to 2000 Hz, 3 axis, 2.5 h]									
Shock	IEC 68.2.29 [40 g, 18 ms, 6 axis, 2000 times]									
Drop Test	100 x 5.9 ft (1.8 m)									
Axial / Radial Force	800 N / 500 N, 10 sec.									
THERMAL										
Storage	-40° to +194° F (-40° to +90° C), 1000 h									
Operating	-40° to +185° F (-40° to +85° C)			-4° to +185° F (-20° to +85° C)			-40° to +185° F (-40° to +85° C)			
Shock/Fatigue	-40° to +194° F (-40° to +90° C), 50x5 min with 30 sec transition									
Peak	284° F (140° C), 100 h									
OTHER										
Standards	EN 60079-0:2009, EN 60079-11:2007, EN 60079-26:2007; ISO 15693, ISO 18000-3						ISO 18000-6C, EPC C1G2 EN 60079-0:2009; EN 60079-11:2007; EN 60079-26:2007			
Box Size	1500 pcs	750 pcs	250 pcs	1500 pcs	750 pcs	750 pcs	250 pcs	50 pcs	250 pcs	50 pcs
Options	Custom embossed, printed or no logo									
Warranty	2 Years									



I M1 Ex ia I Ma
II 1G Ex ia IIC T6 Ga
II 1D Ex ia IIC T85°C Da

For more information, contact tagsales@hidglobal.com



hidglobal.com

North America: +1 512 776 9000 | Toll Free: 1 800 237 7769
Europe, Middle East, Africa: +353 91 506 900
Asia Pacific: +852 3160 9800 | Latin America: +52 55 9171 1108

For more global phone numbers [click here](#)

© 2023 HID Global Corporation/ASSA ABLOY AB. All rights reserved.
2023-01-18-idt-rfid-il-in-tag-family-ds-en PLT-00276
Part of ASSA ABLOY